


11/10/88

OPTION J1 (V.1)

This option allows the user to measure the time of travel of the transducer shaft between two programmed positions.

The start and the end of the time interval are programmed as "from" and "to" set points on LS16.

Example: LS.16 000-180

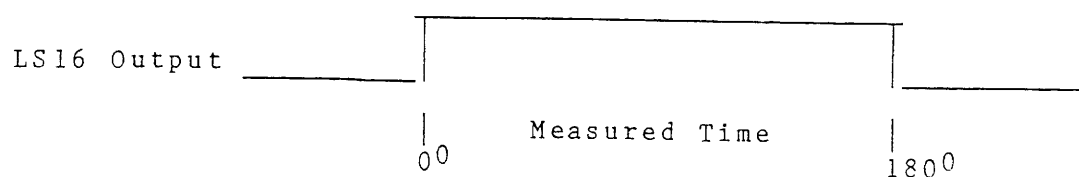

The measured time is limited to 99.99 sec maximum and is displayed on the POS/TAC key's display.

P. xxx tt.tt xxx = Current position
 tt.tt = time in seconds

Consequently depressing the POS/TACH key changes the display between:

 P. xxx tt.tt tt.tt = measured time
and
 P xxx t.yyy yyy = tachometer value
 xxx = current position